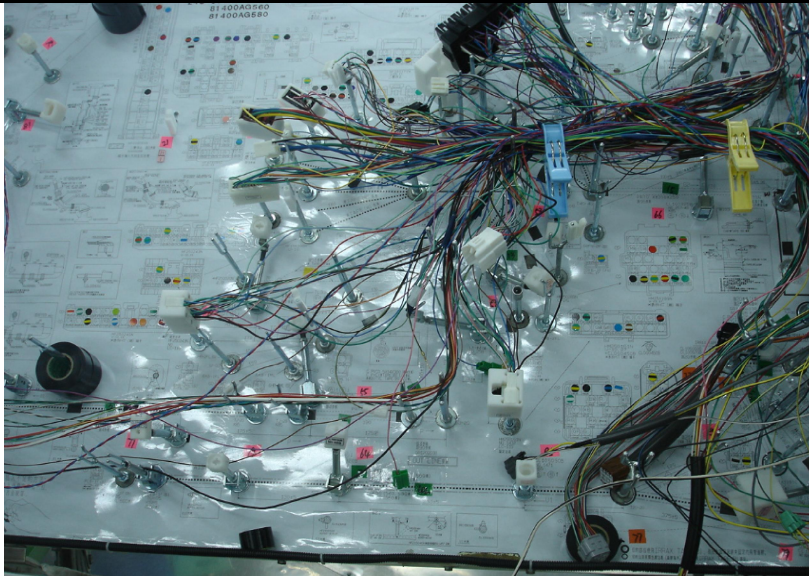




Needle shaped harness fork



Functional Description

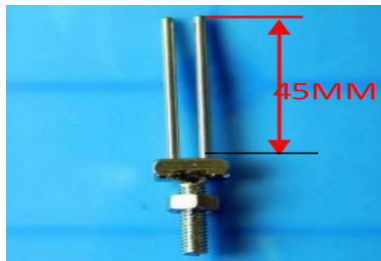
Mainly used for hanging the protective sheath at the end of the tooling board, (hanging terminal wires can be used with rubber wheels for trial, and the bottom is matched with a fixed rod, which can be used upside down)

Specifications

Material: Iron plated and stainless steel
 Steel electroplating: galvanizing, nickel plating
 Chrome plated thread length 25MM, 2-pin interval
 Distance of 4MM
 (Special sizes can be customized)

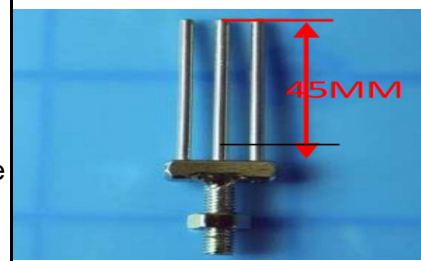
XY-ZJ4501

2-Needle
Fixtures




XY-ZJ4502

3-Needle Fixture




XY-ZJ4503






4-Needle
Fixtures
















XY-ZJ4504










5-Needle Fixture



















Functional Description		Specifications	
<p>Mainly used for tooling board branching can also be used for the end of sheath hanging ,(the bottom is matched with a fixed rod, which can be used upside down)</p>		<p>Material: Iron plated and stainless steel Electroplating: Galvanized, Nickel Plated, Chrome Plated Screw Thread Length 25MM (Special sizes can be customized)</p>	
<p>XY-ZJ5001</p> <p>U-Shaped Harness Fork 5mm</p>			
Functional Description		Specifications	
<p>Mainly used for tooling board branching ,(the bottom is matched with a fixed rod, which can be used upside down)</p>		<p>Material: Iron plated and stainless steel Electroplating: Galvanized, Nickel Plated, Chrome Plated Screw Thread Length 25MM (Special sizes can be customized)</p>	
<p>XY-ZJ5002</p> <p>U-Shaped Harness Fork 10mm</p>		<p>XY-ZJ5003</p> <p>U-Shaped Harness Fork 15mm</p>	
<p>XY-ZJ5004</p> <p>U-Shaped Harness Fork 20mm</p>		<p>XY-ZJ5005</p> <p>U-Shaped Harness Fork 25mm</p>	








<p>XY-ZJ5506</p> <p>U-Shaped Harness Fork 30mm</p>		<p>XY-ZJ6007</p> <p>U-Shaped Harness Fork 35mm</p>	
<p>XY-ZJ6608</p> <p>U-Shaped Harness Fork 40mm</p>		<p>XY-ZJ7009</p> <p>U-Shaped Harness Fork 45mm</p>	
<p>XY-ZJ7010</p> <p>U-Shaped Harness Fork 50mm</p>			
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for tooling board branching ,(the bottom is matched with a fixed rod, which can be used upside down)</p>		<p>Material: Iron plated and stainless steel Electroplating: Galvanized, Nickel Plated, Chrome Plated Screw Thread Length 25MM (Special sizes can be customized)</p>	
<p>XY-ZJ5001</p> <p>J-Shaped Harness Fork 5mm</p>		<p>XY-ZJ5002</p> <p>J-Shaped Harness Fork 20mm</p>	





<p>XY-ZJ5003</p> <p>J-Shaped Harness Fork 25mm</p>		<p>XY-ZJ5504</p> <p>J-Shaped Harness Fork 30mm</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for hanging end flag terminals, substrate terminals, and single terminal products (with bottom matching fixing rods, can be used upside down)</p>		<p>Material: Iron plated and stainless steel Electroplating: Galvanized, Nickel Plated, Chrome Plated Screw Thread Length 22MM (Special sizes can be customized)</p>	
<p>XY-ZJ5001</p> <p>V-Shaped Harness Fork 3mm</p>		<p>XY-ZJ5002</p> <p>V-Shaped Harness Fork 5mm</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used at T-shaped branches (Bottom matching fixed rod, can be used upside down)</p>		<p>Material: Iron plated and stainless steel Electroplating: Galvanized, Nickel Plated, Chrome Plated Screw Thread Length 25MM (Special sizes can be customized)</p>	
<p>XY-ZJ5001</p> <p>U-Shaped 3- Hook Harness Fork U10-L10</p>		<p>XY-ZJ5002</p> <p>U-Shaped 3- Hook Harness Fork U15-L15</p>	








<p>XY-ZJ5003</p> <p>U-Shaped 3-Hook Harness Fork U20-L20</p>		<p>XY-ZJ5004</p> <p>U-Shaped 3-Hook Harness Fork U25-L25</p>	
<p>XY-ZJ5005</p> <p>U-Shaped 3-Hook Harness Fork U30-L30</p>		<p>XY-ZJ5006</p> <p>U-Shaped 3-Hook Harness Fork U35-L35</p>	
<p>XY-ZJ5007</p> <p>U-Shaped 3-Hook Harness Fork U40-L40</p>		<p>XY-ZJ5008</p> <p>U-Shaped 3-Hook Harness Fork U45-L45</p>	
<p>XY-ZJ45009</p> <p>U-Shaped 3-Hook Harness Fork U50-L50</p>			
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used at the cross-shaped branch point (Bottom cover fixed rod, can be used upside down)</p>		<p>Material: Iron plated and stainless steel Electroplating: Galvanized, Nickel Plated, Chrome Plated Screw Thread Length 25MM (Special sizes can be customized)</p>	
<p>XY-ZJ5001</p> <p>U-Shaped Four Hook Harness Fork U10-L10</p>		<p>XY-ZJ5002</p> <p>U-Shaped Four Hook Harness Fork U15-L15</p>	









<p>XY-ZJ5003</p> <p>U-Shaped Four Hook Harness Fork U20-L20</p>		<p>XY-ZJ5004</p> <p>U-Shaped Four Hook Harness Fork U25-L25</p>	
<p>XY-ZJ5505</p> <p>U-Shaped Four Hook Harness Fork U30-L30</p>		<p>XY-ZJ6006</p> <p>U-Shaped Four Hook Harness Fork U35-L35</p>	
<p>XY-ZJ6507</p> <p>U-Shaped Four Hook Harness Fork U40-L40</p>			
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for hanging and organizing long lines in the middle section (to prevent scattered wires)</p>		<p>Material: ABS+electroplated iron Electroplating: Galvanized Screw thread size: 18MM and 35MM</p>	
<p>XY-ZJ1001</p> <p>Unilateral Peach Shaped Wire Harness Fixture 10mm</p>		<p>XY-ZJ1502</p> <p>Unilateral Peach Shaped Wire Harness Fixture 15mm</p>	
<p>XY-ZJ1503</p> <p>Unilateral Peach Shaped Wire Harness Fixture 15mm</p>		<p>XY-ZJ2004</p> <p>Unilateral Peach Shaped Wire Harness Fixture 20mm</p>	









<p>XY-ZJ2505</p> <p>Unilateral Peach Shaped Wire Harness Fixture 25mm</p>		<p>XY-ZJ3006</p> <p>Unilateral Peach Shaped Wire Harness Fixture 30mm</p>	
<p>XY-ZJ4007</p> <p>Unilateral Peach Shaped Wire Harness Fixture 40mm</p>		<p>XY-ZJ5008</p> <p>Unilateral Peach Shaped Wire Harness Fixture 50mm</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for hanging and organizing long lines in the middle section (to prevent scattered wires)</p>		<p>Material: ABS+iron electroplating, stainless steel Electroplating: Zinc plating, nickel plating, chrome plating (Special materials can be customized)</p>	
<p>XY-ZJ2001</p> <p>Wire Holding Fixture 20mm</p>		<p>XY-ZJ2502</p> <p>Wire Holding Fixture 25mm</p>	
<p>XY-ZJ3003</p> <p>Wire Holding Fixture 30mm</p>			
<p>Functional Description</p>		<p>Specifications</p>	









Single line wire holding fixture(to prevent scattered wires)		Material: Silicone sheet+ABS+Iron electroplating Electroplating: Zinc plating, nickel plating, chrome plating	
XY-ZJ0601 Soft Harness Clamp(without holes) U6		XY-ZJ1002 Soft Harness Clamp(without holes) U10	
XY-ZJ1003 Soft Harness Clamp(with holes) U10		XY-ZJ1804 Soft Harness Clamp(seamless with holes) U18	
XY-ZJ1805 Soft Harness Clamp(with seams and holes) U18			
Functional Description		Specifications	
Mainly used for hanging the protective sheath at the end of the tooling board		Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 110MM and 130mm Thread 35mm 2 Needle spacing 4mm (Other sizes can be customized upon request)	
XY-ZJ5001 Regular 2 Needle Fixture		XY-ZJ5002 Regular 3 Needle Fixture	









<p>XY-ZJ5003</p> <p>Regular 4 Needle Fixture</p>			
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for hanging the protective sheath at the end of the tooling board</p>		<p>Material: ABS+electroplating+stainless steel needle Electroplating: Zinc plating, nickel plating, chrome plating 2 needles spaced 4mm apart</p>	
<p>XY-ZJ4501</p> <p>Injection Molding Fixed 2 Needle Fixture</p>		<p>XY-ZJ4502</p> <p>Injection Molding Fixed 3 Needle Fixture</p>	
<p>XY-ZJ4503</p> <p>Injection Molding Fixed 4 Needle Fixture</p>			
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for wiring branches and positioning on tooling boards</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 110mm and 1mm Thread 40mm (Other sizes can be customized upon request)</p>	








<p>XY-ZJ5001 U2 Fixture</p>			
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for wiring branches and positioning on tooling boards</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 110mm and 130mm Thread 35mm (Other sizes can be customized upon request)</p>	
<p>XY-ZJ6002 U5 Fixture</p>		<p>XY-ZJ6003 U10 Fixture</p>	
<p>XY-ZJ6004 U15 Fixture</p>		<p>XY-ZJ6005 U20 Fixture</p>	
<p>XY-ZJ6005 U25 Fixture</p>		<p>XY-ZJ6006 U30 Fixture</p>	








<p>XY-ZJ6007 U35 Fixture</p>		<p>XY-ZJ6508 U40 Fixture</p>	
<p>XY-ZJ7009 U45 Fixture</p>		<p>XY-ZJ7010 U50 Fixture</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for wiring branches and positioning on tooling boards</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 110mm and 130mm Thread 35mm (Other sizes can be customized upon request)</p>	
<p>XY-ZJ5001 J05 Fixture</p>		<p>XY-ZJ5002 J10 Fixture</p>	
<p>XY-ZJ5003 J15 Fixture</p>		<p>XY-ZJ5004 J20 Fixture</p>	





<p>XY-ZJ5005 J25 Fixture</p>		<p>XY-ZJ5006 J30 Fixture</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for wiring branches and positioning on tooling boards</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 110mm and 130mm Thread 35mm (Other sizes can be customized upon request)</p>	
<p>XY-ZJ5001 3-Hook Harness Fork U10- L10</p>		<p>XY-ZJ5002 3-Hook Harness Fork U15- L15</p>	
<p>XY-ZJ5003 3-Hook Harness Fork U20- L20</p>		<p>XY-ZJ5004 3-Hook Harness Fork U25- L25</p>	
<p>XY-ZJ6005 3-Hook Harness Fork U30- L30</p>		<p>XY-ZJ6006 3-Hook Harness Fork U35- L35</p>	






<p>XY-ZJ6507</p> <p>3-Hook Harness Fork U40- L40</p>		<p>XY-ZJ7008</p> <p>3-Hook Harness Fork U45- L45</p>	
<p>XY-ZJ7009</p> <p>3-Hook Harness Fork U50- L50</p>		<p>XY-ZJ7010</p> <p>3-Hook Harness Fork U60- L60</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for wiring branches and positioning on tooling boards</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 110mm and 130mm Thread 35mm (Other sizes can be customized upon request)</p>	
<p>XY-ZJ5001</p> <p>4-Hook Harness Fork U10- L10</p>		<p>XY-ZJ5002</p> <p>4-Hook Harness Fork U15- L15</p>	
<p>XY-ZJ5003</p> <p>4-Hook Harness Fork U20- L20</p>		<p>XY-ZJ5004</p> <p>4-Hook Harness Fork U25- L25</p>	








<p>XY-ZJ6005</p> <p>4-Hook Harness Fork U30- L30</p>		<p>XY-ZJ6006</p> <p>4-Hook Harness Fork U35- L35</p>	
<p>XY-ZJ6507</p> <p>4-Hook Harness Fork U40- L40</p>		<p>XY-ZJ7008</p> <p>4-Hook Harness Fork U45- L45</p>	
<p>XY-ZJ7009</p> <p>4-Hook Harness Fork U50- L50</p>		<p>XY-ZJ7010</p> <p>4-Hook Harness Fork U60- L60</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for wiring branches and positioning on tooling boards</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 110mm and 130mm Thread 35mm (Other sizes can be customized upon request)</p>	
<p>XY-ZJ4001</p> <p>Fixture Rod Ø3</p>		<p>XY-ZJ4002</p> <p>Fixture Rod Ø4</p>	

<p>XY-ZJ4003</p> <p>Fixture Rod Ø5</p>		<p>XY-ZJ4004</p> <p>Fixture Rod Ø6</p>	
<p>XY-ZJ4005</p> <p>Fixture Rod Ø8</p>			
<p>Functional Description</p>		<p>Specifications</p>	
<p>Invertable end sheath hanging fixture</p>		<p>Material: ABS+galvanized screw thread 28MM Color: Customizable</p>	
<p>XY-ZJ4501</p> <p>Movable 2 Needle Fixture</p>		<p>XY-ZJ4502</p> <p>Movable 3 Needle Fixture</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for branch positioning and positioning of end POM sheath fixtures (used in conjunction with head fixtures)</p>		<p>Material: ABS+galvanized screw thread 28MM Color: Customizable</p>	
<p>XY-ZJ5001</p> <p>Positioning Invertable Fixture L50</p>		<p>XY-ZJ7002</p> <p>Positioning Invertable Fixture L70</p>	







<p>XY-ZJ9003</p> <p>Positioning Invertable Fixture L90</p>		<p>XY-ZJ7004</p> <p>Old Type Positioning Fixture L70</p>	
<p>XY-ZJ9005</p> <p>Old Type Positioning Fixture L90</p>		<p>XY-ZJ5006</p> <p>New Type Positioning Fixture L50</p>	
<p>XY-ZJ7007</p> <p>New Type Positioning Fixture L70</p>		<p>XY-ZJ9008</p> <p>New Type Positioning Fixture L90</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>In areas with dense branches, used on the main line, fixtures can be placed down for easy operation by employees</p>		<p>Material: Aluminum profile+Iron electroplating Electroplating: Nickel plating Height: Regular size 130、140MM (Special sizes can be customized)</p>	
<p>XY-ZJ1301</p> <p>Telescopic Fixture</p>			

Functional Description		Specifications	
<p>Mainly used for hanging the protective cover at the end of the tooling board (directly locked onto the tooling board with wooden screws)</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 85MM and 105MM 2-pin spacing 4MM base 43mm * 20mm (special sizes can be customized)</p>	
<p>XY-ZJ5001 T-Shaped Base Fixture 2-Needle</p>		<p>XY-ZJ5002 T-Shaped Base Fixture 3-Needle</p>	
<p>XY-ZJ5003 T-Shaped Base Fixture 4-Needle</p>			
Functional Description		Specifications	
<p>Mainly used for hanging the terminal at the end of the fixture board (directly locked onto the fixture board with wooden screws)</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 85MM and 105MM base 43mm * 20mm (special sizes can be customized)</p>	
<p>XY-ZJ5001 T-Shaped Base Fixture V03</p>			


Functional Description		Specifications	
<p>Mainly used for wiring branches and positioning on tooling boards (directly locked onto the tooling board with wooden screws)</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 85MM and 105MM base 43mm * 20mm (special sizes can be customized)</p>	
<p>XY-ZJ5001 T-Shaped Base Fixture U05</p>		<p>XY-ZJ5002 T-Shaped Base Fixture U10</p>	
<p>XY-ZJ5003 T-Shaped Base Fixture U15</p>			
Functional Description		Specifications	
<p>Mainly used for wiring branches and positioning on the fixture board (locked onto the fixture board with M6 screws and fixed with wooden screws)</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Regular pole length dimensions: 85MM and 105MM Base 56mm * 20mm (special sizes can be customized)</p>	
<p>XY-ZJ5001 L-Shaped Base Fixture 4 Fork U10</p>		<p>XY-ZJ5002 L-Shaped Base Fixture 4 Fork U15</p>	

<p>XY-ZJ5003</p> <p>L-Shaped Base Fixture 4 Fork U20</p>		<p>XY-ZJ5004</p> <p>L-Shaped Base Fixture 4 Fork U25</p>	
<p>XY-ZJ5005</p> <p>L-Shaped Base Fixture 4 Fork U30</p>		<p>XY-ZJ5506</p> <p>L-Shaped Base Fixture 4 Fork U35</p>	
<p>XY-ZJ6007</p> <p>L-Shaped Base Fixture 4 Fork U40</p>		<p>XY-ZJ7008</p> <p>L-Shaped Base Fixture 4 Fork U45</p>	
<p>XY-ZJ7009</p> <p>L-Shaped Base Fixture 4 Fork U50</p>			


Functional Description		Specifications	
<p>Mainly used for wiring branches and positioning on the fixture board (locked onto the fixture board with M6 screws and fixed with wooden screws)</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Regular pole length dimensions: 85MM and 105MM Base 56mm * 20mm (special sizes can be customized)</p>	
<p>XY-ZJ5001 L-Shaped Base Fixture 3 Fork U10</p>		<p>XY-ZJ5002 L-Shaped Base Fixture 3 Fork U15</p>	
<p>XY-ZJ5003 L-Shaped Base Fixture 3 Fork U20</p>		<p>XY-ZJ5004 L-Shaped Base Fixture 3 Fork U25</p>	
<p>XY-ZJ5005 L-Shaped Base Fixture 3 Fork U30</p>		<p>XY-ZJ6006 L-Shaped Base Fixture 3 Fork U35</p>	
<p>XY-ZJ6007 L-Shaped Base Fixture 3 Fork U40</p>		<p>XY-ZJ6508 L-Shaped Base Fixture 3 Fork U45</p>	


<p>XY-ZJ7009</p> <p>L-Shaped Base Fixture 3 Fork U50</p>		<p>XY-ZJ7010</p> <p>L-Shaped Base Fixture 3 Fork U60</p>	
<p>Functional Description</p>		<p>Specifications</p>	
<p>Mainly used for wiring branches and positioning on the fixture board (locked onto the fixture board with M6 screws and fixed with wooden screws)</p>		<p>Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Regular pole length dimensions: 85MM and 105MM Base 56mm * 20mm (special sizes can be customized)</p>	
<p>XY-ZJ5001</p> <p>Circular Base Fixture U30</p>		<p>XY-ZJ5002</p> <p>Circular Base Fixture 6-Needle</p>	
<p>XY-ZJ5003</p> <p>Circular Base Fixture 3-Fork U20</p>		<p>XY-ZJ5004</p> <p>Circular Base Fixture 3-Fork U30</p>	

Functional Description	Specifications
Sheath fixed bottom rod	Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length dimensions: 50, 60, 70, 80, 90, 100, 110 (Special sizes can be customized)

XY-ZJ5001 L-Shaped Positioning Base	
---	--

Functional Description	Specifications
Hanging adhesive tape fixture	Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating (Special sizes can be customized)

XY-ZJ1001 L-Shaped Adhesive Tape Fixture	
---	---

Functional Description		Specifications	
Connect the base		Material: Iron plated and stainless steel Electroplating: Zinc plating, nickel plating, chrome plating Conventional pole length size: 50, 60, 70, 80, 90, 100, 110 (Special sizes can be customized)	
XY-ZJ5001 L-Shaped Fixed Rod		XY-ZJ5002 Circular Base - Fixed Rod	